


## ACFOAM® CROSSVENT® EPS VENT SPACERS®

- 1.0", 1.5" & 2.0" spacer strips manufactured for superior ACFoam® CrossVent® performance
- 6000 PSF compressive resistance
- Unlimited fastening support along 48" dimension
- Engineered for maximum net free area
- Superior dimensional stability
- Contains no VOCs or chemical preservatives
- Moisture, mold and rot resistant
- Recyclable

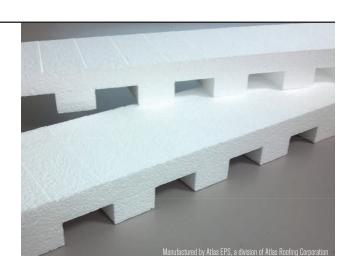

## CONTINUOUS SUPPORT FOR FASTENING GUIDELINES THAT:

- Have been tested by a 3rd party testing laboratory
- Have been verified by a 3rd party engineering firm
- Meet FM 1-60, 1-75, 1-90 & 1-105 windstorm classifications
- Accomodate FM 1-29 prescriptive enhancement options for corners with one fastener per sq. ft. (min. 32 fasteners per 4' × 8' board)
- Can meet ASCE 7-10 requirements



- Continuous fastening support 24" on center
- Engineered to deliver industry leading support of the Atlas ACFoam® CrossVent® wood layer
- Increased surface area ensures that the EPS vent strip remains securely bonded to the wood layer and polyiso layer from manufacture through installation



2000 RiverEdge Parkway, Suite 800, Atlanta, Georgia 30328

roof.atlasroofing.com

