

**DESCRIPTION:** Heavy Duty Nailable Insulation Fastener with #4 Heavy Duty Drill Point. Specially engineered for attaching EnergyShield® Ply Pro to thick steel substrates.



MATERIAL: Case hardened and Tempered Carbon Steel
HEAD STYLE/DRIVE: Pancake Head with T-30 Internal Drive

HEAD DIAMETER: 0.625"
SHANK DIAMETER: 0.212"
THREAD LENGTH: 3.875"
OVERALL LENGTH: 6" thru 13.75"

OVERALL LENGTH. 0 und 10.10

**POINT:** #4 (0.225" dia.) Heavy Duty Drill Point

**COATING:** Epoxy E-Coat (black)


Passes more than 15 cycles (Kesternich) in accordance with DIN 50018

TENSILE STRENGTH	SHEAR STRENGTH	HEAD PULL-THRU VALUE (7/16" OSB)	
6,000 lbf	3,400 lbf	545 lbf	

WITHDRAWAL VALUES IN STEEL <sup>1</sup>					
Structural Steel	16 Ga.	13 Ga.	12 Ga.	3/ <sub>16</sub> "	1/4″
lbf	770	1130	1690	3100	4500

<sup>1</sup>"Head Pull-Thru" and "Withdrawal" data reflect average ultimate values.

Note: All tests were conducted by an independent testing laboratory. Test results are offered only as a guide and are not guaranteed in any way by Atlas Roofing Corporation.

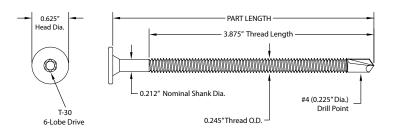

## PRODUCT SELECTION

IN	MM	PKG. QTY.
6.0	152	500/PAIL
8.0	203	250/PAIL
9.75	248	250/PAIL
11.75	298	250/PAIL
13.75	349	250/BOX

NOTE: Two T-30 Driver Bits included in each package.



Other than the aforementioned representations and descriptions, Atlas Roofing Corporation (hereafter, "Seller") makes no other representations or warranties as to the insulation sold herein. The Seller disclaims all other warranties, express or implied, including the warranty of merchantability and the warranty of fitness for a particular purpose. Seller does, however, have a limited warranty as to the LTTR-Value of the insulation, the terms of which are available upon request from the Seller. Seller shall not be liable for any incidental or consequential damages including but not limited to the cost of installation, removal, repair or replacement of this product. Buyer's remedies shall be limited exclusively to, at Seller's option, the repayment of the purchase price or resupply of product manufactured by Atlas in a quantity equal to that of the nonconforming product. Atlas distributors, agents, salespersons or other independent representatives have no authority to waive or alter the above limitation of liability and remedies.

