
Revised: 8/24/22

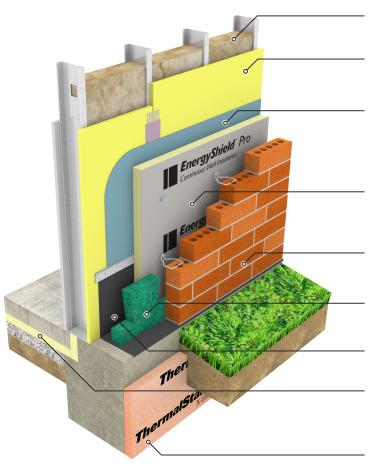

Fiberglass batt cavity insulation

Metal framing with Type X coated glass mat exterior gypsum sheathing

Moisture/air/vapor barrier as required (fluid applied as shown, or peel and stick, trowel applied or building wrap)

Atlas EnergyShield\* Pro polyisocyanurate continuous insulation


Masonry veneer & brick ties fastened to metal framing

2" Mortar deflector in 2" air space

Masonry flashing with termination bar

Atlas EnergyShield", EnergyShield" CGF or EnergyShield" PanelCast" polyisocyanurate continuous insulation

Atlas ThermalStar\* X-Grade\* EPS rigid continuous insulation at foundation



**Note:** Example illustrations are for reference only to graphically depict location of Atlas manufactured materials in relationship to other materials in a wall assembly. The images are not intended for construction documentation. A registered professional must review for accuracy and approve fitness for intended use. These images are the property of Atlas Roofing Corporation.